


# Indoor Wall Mounted Mirror Digital Display




Indoor wall-mounted mirror advertising displays save space and attract attention with their unique design. They are multifunctional, easy to install, and provide high-quality visuals

- Space-saving
- Multifunctional
- Aesthetic Appeal
- Energy Efficiency
- Safety Features

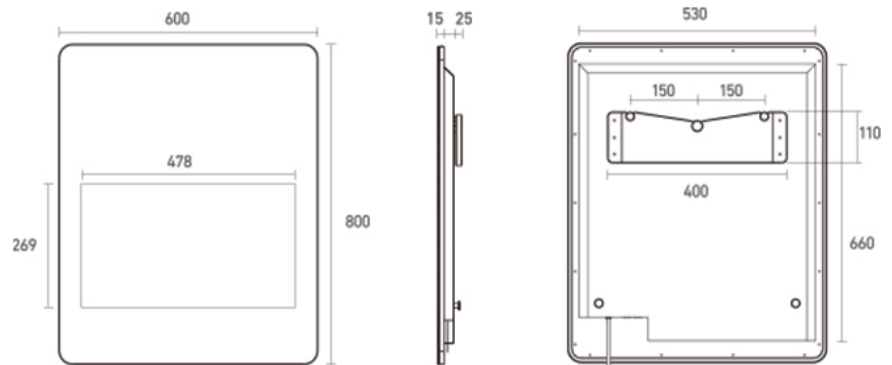

Thin frame trendy style  
product detail presentation

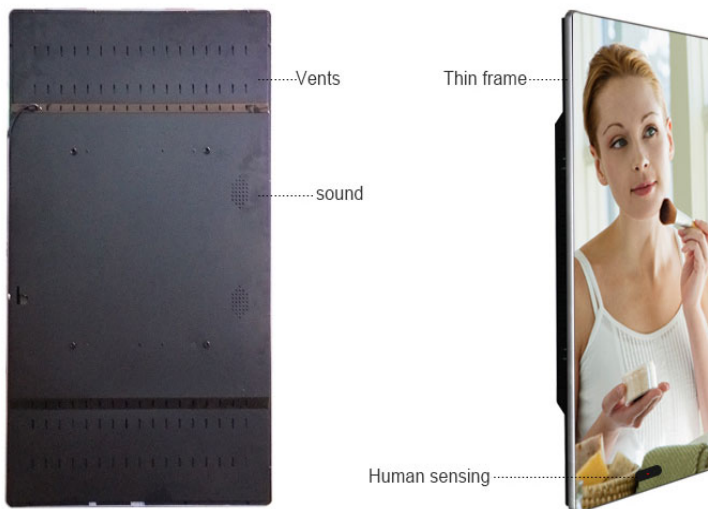

## Specifications

- Resolution : 1K ( 4K Optional )
- 1400:1 Contrast Ratio
- Brightness 350 cd/m2
- Viewing Angle: 178°
- Use in indoor
- Screen type: :LCD Screen
- Touch Screen:Support
- Remote control

## BrightSign Features:



## Cloud Management System

The Letine platform runs in the cloud. All you need to access it is a web browser. Our servers are secure, scalable, and built with full redundancy, so your screens never stop!

To present the content on your screens, you need a small computer, or as we call it, a Player. Letine is the platform with the largest list of compatible hardware in the market!



## Options:

### Android Network Version:

1. Android 4.4/5.1/6.0/7.1/8.0/9.0/10.0/0s optional
2. 1GB/2GB/ 4GB/ 8GB ( DDR3 ) optional
3. 8GB / 16GB / 32GB /64GB flash optional
4. Touch screens optiona
5. RK3568 / RK3566 / RK3588 optional
6. Support WIFI/LAN network ,3G/4G network optional
7. HDMI Interface .AV, mircophone, USB, RJ-45



### All In One PC version

1. CPU: Intel i3/15/17
2. Memory: 4GB /8GB
3. RAM: 60GB / 120GB / 256GB SSD.500GB / 1TB HDD
4. OS : Win:7 /8/10,



## Single Version





1. Plug SD card and play automatically.
2. Update documents to SD card by USB drive.
3. Support connecting with media player box / PC by HD input
4. Other functions: playlist, timer, sideshow, spitview scrolling text
- 5.V/O: USB. SD card.



# Information Sheet

Screen size	32 inch	43 inch	49 inch	55 inch	65 inch	75Inch	86Inch	98 Inch
Resolution	1920×1080	1920×1080	1920×1080	1920×1080	3840×2160	3840×2160	3840×2160	3840×2160
Contrast ratio	1400:1typ							
Screen ratio	16.09							
Brightness	350cd/m							
Viewing angle	178°							
Display Color	16.7M							
Input voltage	AC110-240V (50Hz-60Hz)							
Mainboard	RK3568							
Memory	2G+16GB							
Play mode	Automatic loop playback at startup							
Split screen playback	Supports landscape, portrait, full screen and split screen playback							
Timer switch playback	(5-segment switch per day), can be set seven days a week, and implements 24-hour unattended management							
Audio/Sounds	Left channel, right channel, 8Ω 5W speaker							
Support subtitles	Mobile subtitles can be set to play subtitles in advertising programs							
Play file format	Video: All video formats Pictures: JPG, GIF, BMP Music: MP3 style music							
Network Interface	RJ45/IEEE802.31/100M ETHERNET LAN; WIFI							
Log management	Support terminal log and program log management							
Program import port	USB2.0 high speed							
Remote power on/off	Manual power on and off, automatic timer power on and off, remote restart.							
Backend operating software	(LAN/Internet, B/S management software)							
Touch Screen Type	Capacitive/Infrared/Touchscreen							
Backend server requirements	WIN7 32-bit Ultimate System							

# Applications

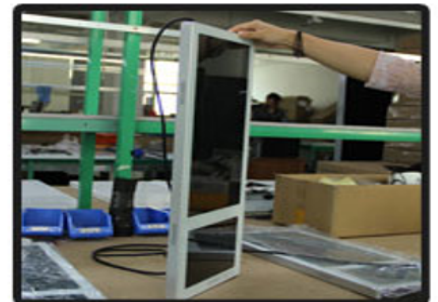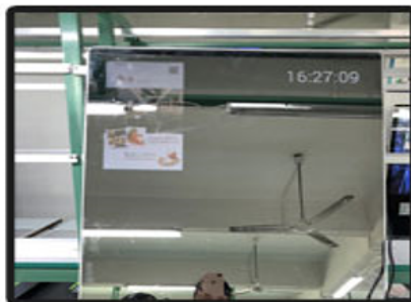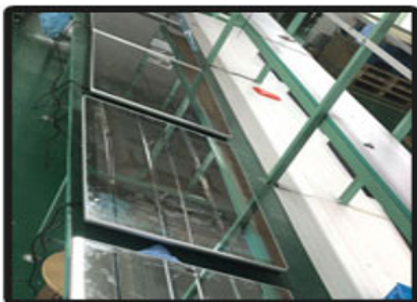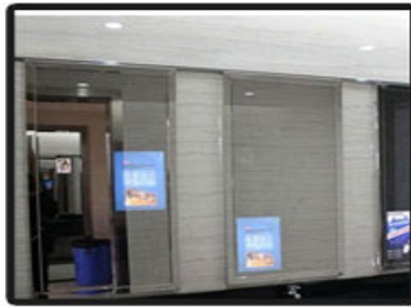

## Our Partners



## Contact Information

With 19 years of experience, LETINE is a leading provider of digital signage solutions. Our products feature advanced motherboard technology and are customizable to meet unique client needs. We deliver high-quality visual experiences in various settings, including retail, corporate, and hospitality.



Address: Floor 2, Building 5, Dongwu  
Industrial Park, Donghuan 1st Road, Longhua  
District, Shenzhen, Guangdong, China

Phone: +86 18665355467  
Email: [sales@letine.com](mailto:sales@letine.com)  
Website: [www.letine.com](http://www.letine.com)